With the AIRPULLER AP 95 you can do all the dent repairs from the outside in a fraction of the time that is normally needed when using existing tools. For example:

on hail damage.

☐ little dents,

on double-sided car body areas,

for panel shrinking.

The AIRPULLER AP 95 will be an indispensable tool in all:

agrages, body shops,

paint shops, petrol stations,

commercial and transport companies,

□ taxi and hire car fleets.

From now on, frightening hail damage on car roofs can be removed without any problem.

When you use the AIRPULLER AP 95 you will not have to spend time on expensive preparations or on removing the inside trimmings.

The AIRPULLER AP 95 comes at a favourable price, reduces working time, decreases repair effort and is therefore cutting costs.

Up to now the removal of dents in motor hoods could not be done efficiently because of the double panels in the front areas. With the AIRPULLER AP 95 you can spend as little time as possible, working from the outside, on the bumps and scratches.

Metal parts will be saved, resources preserved, the consumption of paint and other chemical products reduced, thus making an active contribution to save our environment.

Even panel shrinking of so-called "highspots" is no problem with the AIRPULLER AP 95.

The AIRPULLER AP 95 works as follows:

- it welds on the pin electrode,
- there is an upward stroke of the panel,
- against the pre-adjusted height,
- along with simultaneous cooling to stabalise the body panel,
- ending with a final twist of the pin electrode.

The whole operating sequence is completed within seconds. The very short welding time of approx. 0.3 seconds, heats up the metal at the outside surface without damaging the panel inner surface.

Technical data:

Measures:

190 x 170 x 80 mm

Air pressure:


6 - 8 bor

Weight: 1.8 kg

The AIRPULLER AP 95 fully meets the CE


Standard.

09/96

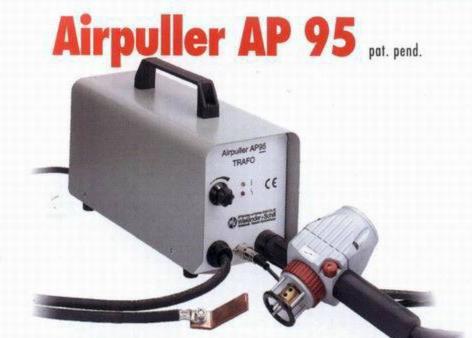

The new and professional panel dent removing system





The AIRPULLER AP 95 is so simple to use, you can use it immediately without any special training, and you will see how clever it is when removing long scratches and scrapes on the side panels of cars. The machine is userfriendly and in a very short time you get perfect results.

Our slogan is: to repair instead of replacing!

The AIRPULLER AP 95 is supplied in a clear

and user-friendly design. The red ring is

turned manually to precisely fix the pulling

height. In the centre is the pin electrode for

panel removing and the additional copper

AIRPULLER AP 95 can be supplied with its

own special control unit or you may use the

Multispot M 3/M 4/M 6/M 8 or other similar

electrode is for the panel shrinking.

products.











Delivery Contents:

Art. No. 3101

☐ AIRPULLER AP 95 in its individual case

□ The basic accessory kit

Multi-lingual operating instructions

Accessory:

☐ TRANSFORMER AP 95 Art. No. 3201 Set with 6 electrodes f. AP 95 Art. No. 3112

□ Diamond file Art. No. 3118

□ Trolley for AP 95 Art. No. 3220

☐ AP Powerlift Art. No. 3250 □ Electrode set for Powerlift Art. No. 3262



鴻豐企業有限公司 HUNG FONG EQUIPMENT SUPPLY SDN BHD (532854-X)

12, Jalan Metro Perdana Timur 4 (Jln 6/34A). Kepong Entrepreneur's Park, 52100 Kuala Lumpur.

AUTOMOTIVE & GARAGE EQUIPMENT TEL: 03-6252 0833 FAX: 03-6258 0833

> E-mail:info@hungfong.net Website:www.hungfong.net